

DLM-11/18/23 ESSENTIAL TUMBLE DRYERS



M PROGRAMMER

New M programmer: push buttons to control temperature and time



OUTSTANDING FEATURES

Reversing drum action as standard
Frequency inverter as standard
Galvanized drum as standard



EFFICIENCY

Big fluff filter



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console



OTHERS

White painted panels
Transmission by direct drive
COOL DOWN - anti-wrinkle at the end of the cycle
Heating options: electric, gas and steam
CE approved


OPTIONS

- M Control programming console
- New M Control with display
- Wooden packing
- Exhaust silencer Ø200
- Ship voltage for electric models:
440V III 50/60 Hz No neutral



TECHNICAL DATA		UNIT.	DLM-11 ESSENTIAL		DLM-18 ESSENTIAL		DLM-23 ESSENTIAL		
CAPACITY									
Capacity 1/18	Kg	12		18		26			
Capacity 1/20	Kg	11		17		23			
Hourly Output ESSENTIAL *	Kg/h	28,6		31,9		40,6			
Evaporation capacity ESSENTIAL *	l/h	14,5		16,3		20,4			
DRUM									
Ø Drum	mm	750		750		855			
Ø Door	mm	574		574		574			
Door center height	mm	976		976		1.030			
Load hole bottom height	mm	689		689		743			
Drum length	mm	475		746		800			
Drum volume	l	210		330		460			
POWER									
Drum motor power	Kw	0,37		0,37		0,37			
Fan motor power ESSENTIAL	Kw	0,25		0,25		0,55			
Electric heating power ALL RANGES	Kw	12		18		24			
Total electric power (elec.model) ESSENTIAL	Kw	12,67		18,67		24,97			
Gas heating power ALL RANGES	Kw	20,51		20,51		31			
Total electric power (gas model) ESSENTIAL	Kw	0,67		0,67		0,97			
CONNECTIONS		ELECTRICAL		GAS	ELECTRICAL		GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	Nº x mm2 / A	3 x 35 / 63A		3 x 1,5 / 20A	-	3 x 1,5 / 20A		-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 10 / 40A		3 x 1,5 / 20A	4 x 16 / 63A	3 x 1,5 / 20A		4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 4 / 25A		3 x 1,5 / 20A	5 x 10 / 32A	3 x 1,5 / 20A		5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"		1/2"		1/2"	1/2"
DIMENSIONS / PACKING DIMENSIONS									
Net width / Gross width	mm	785 / 865		785 / 865		890/970			
Net Depth / Gross Depth	mm	840 / 940		1.110 / 1.210		1.245/1.345			
Net Height / Gross Height	mm	1.694 / 1.840		1.694 / 1.840		1.812/1.940			
Height without heating battery	mm	-		-		-			
Net weight / Gross weight	Kg	172 / 180		187 / 200		210/230			
OTHERS									
Max airflow ESSENTIAL	m3/h	850		850		1.200			
Ø Fume exhaust	mm	200		200		200			
Sound level ESSENTIAL	dB	64		64		65			

* It may vary depending on the type of heating, filter cleanliness or extraction type.

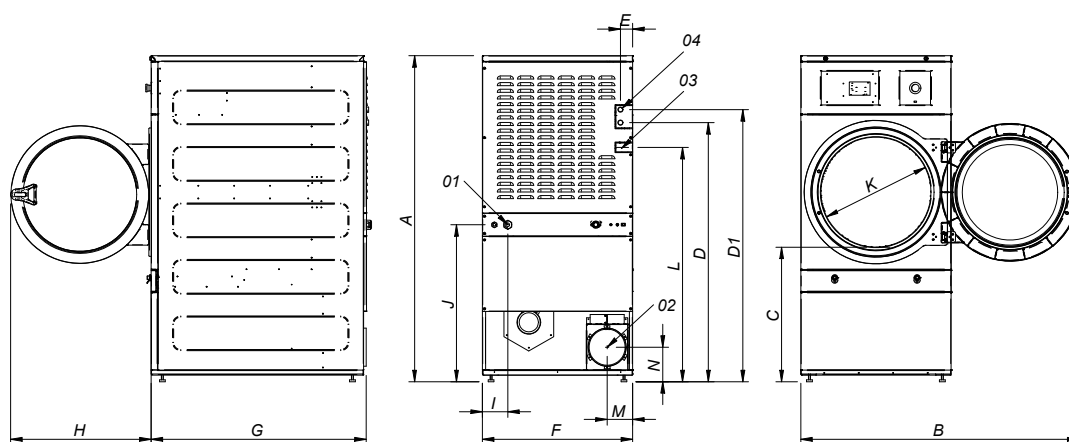

- 01 ELECTRIC CONNECTION
- 02 FUMES OUTLET Ø200
- 03 GAS CONNECTION 1/2"
- 04 STEAM CONNECTION 3/4"

	A	B	C	D	D1	E	F	G	H	I	J	K	L	M	N
DLM-11	1694	1447	689	1354	1422	68	785	855	735	95	821	575	1226	133	180
DLM-18	1694	1447	689	1354	1422	68	785	1125	735	95	821	575	1226	133	180
DLM-23	1812	1552	743	1430	1532	112	890	1255	735	205	862	575	1344	133	180